



78K0R/Kx3 Microcontroller Sample Program Operation Manual (Clock Setting (Clock Generator), C Source)

This software is for reference only and NEC Electronics does not guarantee its operation.
Thoroughly evaluate this software on your set prior to use.

ZUD-CC-07-0217-E
January, 2008

1st Product Solution Group, Multipurpose Microcomputer Systems Division,
Microcomputer Operations Unit
NEC Electronics Corporation

• **The information in this document is current as of January, 2008. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

CONTENTS

1. OVERVIEW.....	4
2. RESOURCES USED	5
3. SOFTWARE CONFIGURATION.....	6
4. FUNCTION EXPLANATIONS	7
5. FLOWCHARTS.....	9

1. OVERVIEW

This manual explains sample program functions of the clock generator for the 78K0R/Kx3.

In this sample program, the clock of the clock generator is switched.

An internal high-speed oscillation clock (8 MHz), X1 clock (20 MHz), or XT1 clock (32.768 kHz) is used as the clock.

A clock output/buzzer output controller is used to check the operation of the clock output.

The clock output is not described in detail in this manual. Please refer to the user's manual of 78K0R/Kx3 device.

The operations of this software are as follows.

- (1) Main system clock switching
(Internal high-speed oscillation clock → X1 clock)
- (2) Main system clock switching
(X1 clock → Internal high-speed oscillation clock)
- (3) CPU clock switching
(Internal high-speed oscillation clock → XT1 clock)
- (4) CPU clock switching
(XT1 clock → Internal high-speed oscillation clock)

2. RESOURCES USED

Resource	Description	Remark
Main clock specification	Internal high-speed oscillator used (8 MHz (TYP.))	Always oscillated
	High-speed system clock used (20 MHz)	Oscillated by initial processing
XT1 clock	XT1 (32.768 kHz)	Oscillated by initial processing
Related hardware	Clock operation mode control register (CMC)	
	Clock operation status control register (CSC)	
	Oscillation stabilization time counter status register (OSTC)	
	Oscillation stabilization time select register (OSTS)	
	System clock control register (CKC)	
	Peripheral enable registers 0 and 1 (PER0 and PER1)	
	Operation speed mode control register (OSMC)	
	Internal high-speed oscillator trimming register (HIOTRM)	
	Port mode register 14 (PM14)	
	Port register 14 (P14)	
I/O	Clock output: PCLBUZ0 (P140)	
Interrupt	Not used	
Others	Refer to clock output/buzzer output controller	

3. SOFTWARE CONFIGURATION

Files

File Name	Processing Outline	Remark
K0R_def.h ^{Note}	Definition file	
K0R_init.c	Initialization processing	
K0R_ext.h	External declaration	
K0R_main.c	Main processing	
K0R_sfr_set.c	Clock generator	
K0R_clk_out.c	Clock output/buzzer output controller processing	Please refer to the user's manual of 78K0R/Kx3 device.

Note This file is commonly used by the sample programs.

4. FUNCTION EXPLANATIONS

[File name]

K0R_main.c

Function

Function Name	Processing Outline	Argument	Return Value
main	Main routine	None	None

Function explanations

Function name	main
Processing	Main routine
Argument	–
Return value	–
Description	Performs processing to switch the clock.
Remark	–

[File name]

K0R_sfr_set.c

Functions

Function Name	Processing Outline	Argument	Return Value
SCK_MITX	Switches the main system clock (internal high-speed oscillation clock → X1 clock)	None	None
SCK_MXTI	Switches the main system clock (X1 clock → internal high-speed oscillation clock)	None	None
SCK_CITS	Internal high-speed oscillation CPU clock → XT1 clock	None	None
SCK_CSTI	XT1 clock → internal high-speed oscillation CPU clock	None	None

Function explanations


Function name	SCK_MITX
Processing	Switches the clock.
Argument	–
Return value	–
Description	(Internal high-speed oscillation clock → X1 clock)
Remark	–

Function name	SCK_MXTI
Processing	Switches the clock.
Argument	–
Return value	–
Description	(X1 clock → internal high-speed oscillation clock)
Remark	–

Function name	SCK_CITS
Processing	Switches the clock.
Argument	–
Return value	–
Description	Internal high-speed oscillation CPU clock → XT1 clock
Remark	–

Function name	SCK_CSTI
Processing	Switches the clock.
Argument	–
Return value	–
Description	XT1 clock → internal high-speed oscillation CPU clock
Remark	–

5. FLOWCHARTS

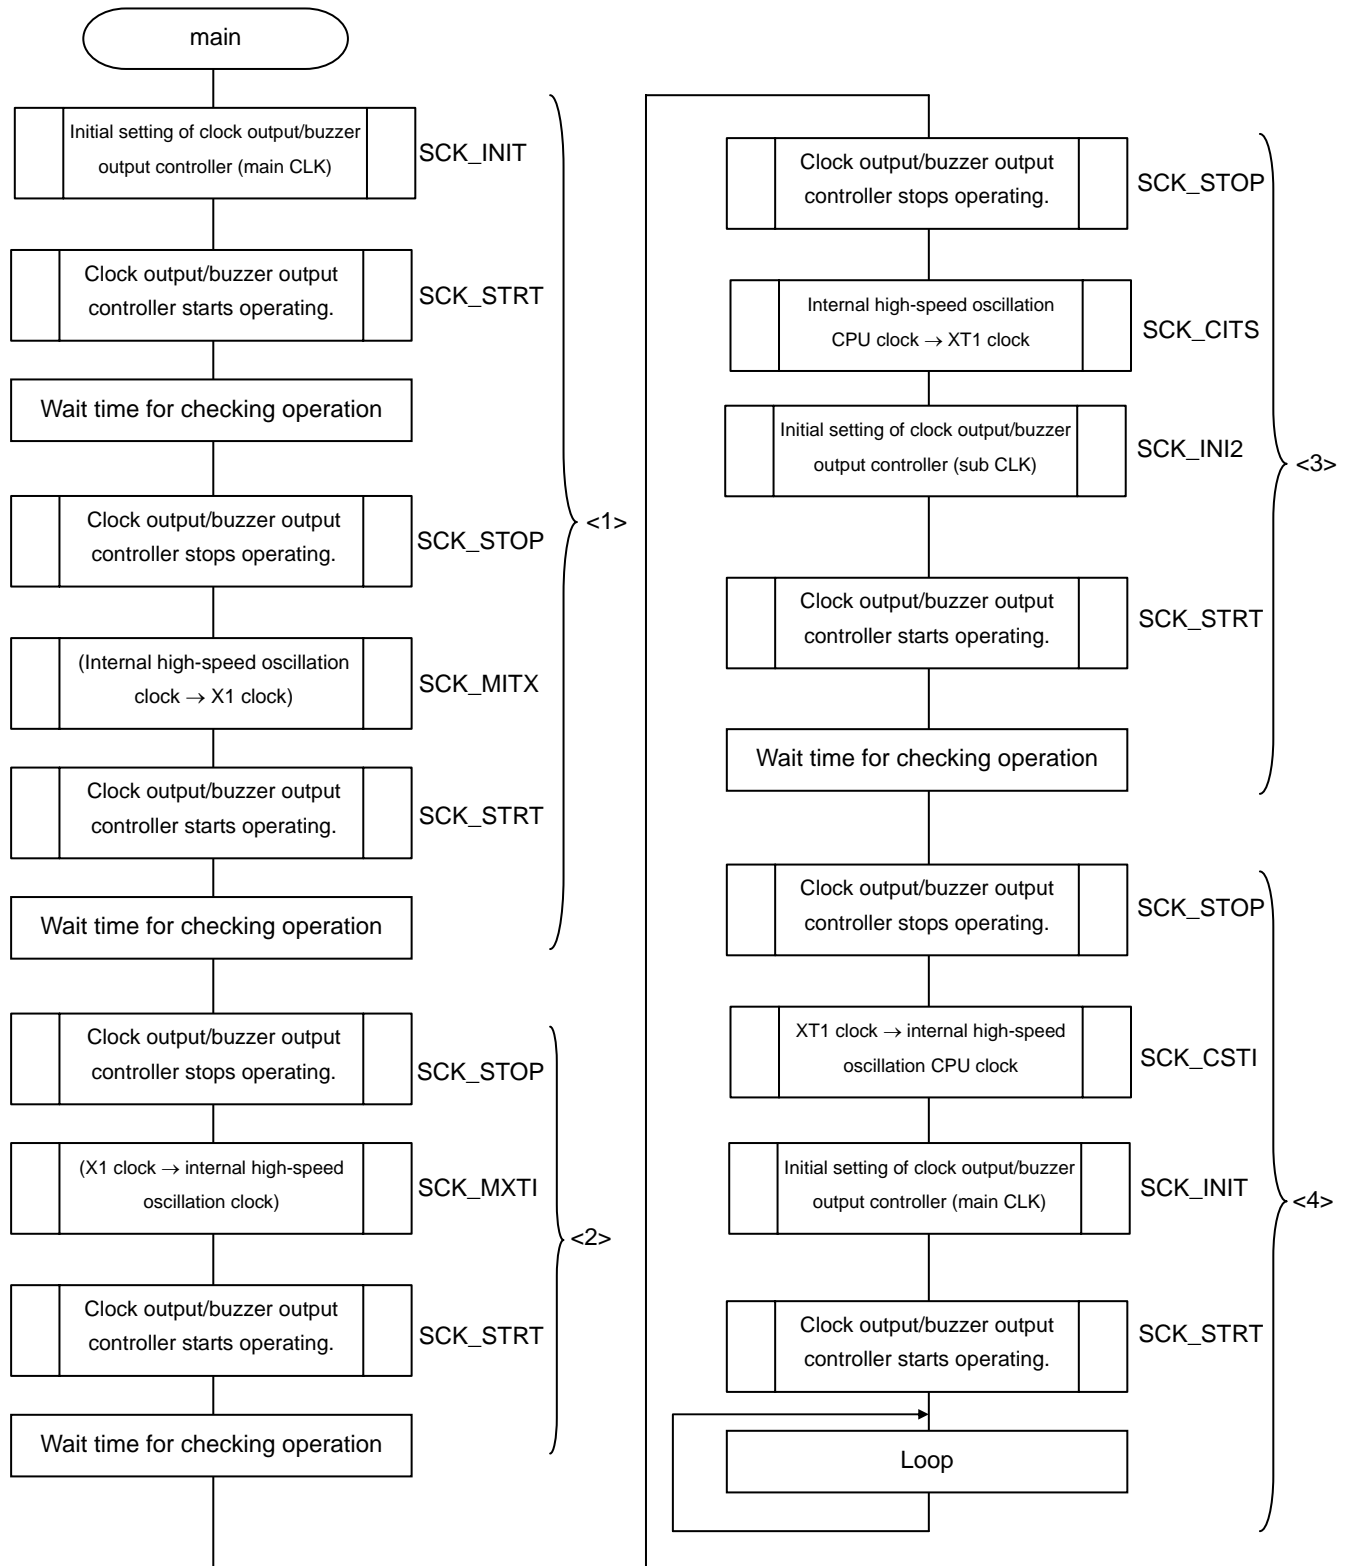

- <1> Internal high-speed oscillation clock → X1 clock
- <2> X1 clock → internal high-speed oscillation clock
- <3> Internal high-speed oscillation clock → XT1 clock
- <4> XT1 clock → internal high-speed oscillation clock

