

ESD NOISE CLIPPING DIODE NNCD2.0DA to NNCD39DA

ELECTROSTATIC DISCHARGE NOISE CLIPPING DIODE 2-PIN SUPER MINI MOLD

DESCRIPTION

These products are the diode developed for ESD (Electrostatic Discharge) noise protection. Based on the IEC61000-4-2 test on electromagnetic interference (EMI), the diode assures an endurance, thus making itself most suitable for external interface circuit protection.


FEATURES

- Based on the electrostatic discharge immunity test (IEC61000-4-2), the product assures the minimum endurance
- Based on the reference supply of the set, the product achieves a series over a wide range (32 product names lined up)
- Package: 2-pin Super Mini Mold (SC-76)

APPLICATIONS

- External interface circuit ESD protection
- Circuits for Waveform clipper, Surge absorber

PACKAGE DRAWING (Unit: mm)

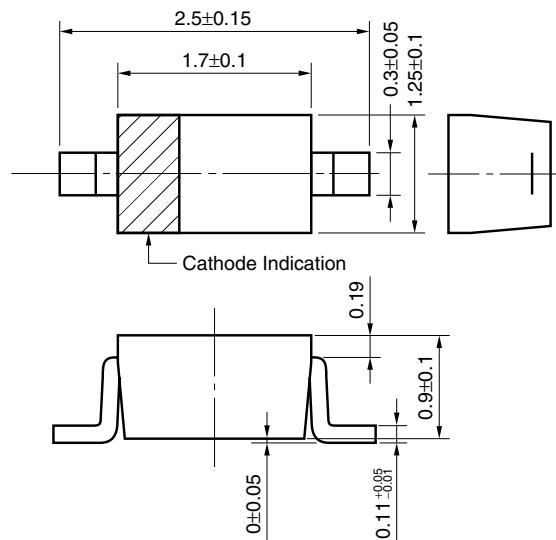

<R>

ORDERING INFORMATION

PART NUMBER	LEAD PLATING	PACKING	PACKAGE
NNCD** ^{Note 1} DA-T1-AT ^{Note 2}	Pure Sn (Tin)	Tape 3000 p/reel	2-pin Super Mini Mold (SC-76)

Notes 1. Type Number

2. Pb-free (This product does not contain Pb in the external electrode and other parts.)

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)

Parameter	Symbol	Rating	Unit	Remark
Power Dissipation	P	200	mW	When surface mounting on 30 mm x 30 mm x 1.6 mm P.C.B. (Glass Epoxy), refer to Figure 1
Surge Reverse Power	P _{RSM}	85	W	t _r = 10 μs, 1 pulse, refer to Figure 5
Junction Temperature	T _j	150	°C	
Storage Temperature	T _{stg}	-55 to +150	°C	

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.


<R> ELECTRICAL CHARACTERISTICS (T_A = 25°C)

Type Number	Breakdown Voltage V _{BR} (V) ^{Note 1}			Dynamic Impedance Z _z (Ω) ^{Note 2}		Reverse Leakage I _R (μA)		Capacitance C _t (pF)		ESD Voltage (kV) ^{Note 3}	
	MIN.	MAX.	I _T (mA)	MAX.	I _T (mA)	MAX.	V _R (V)	TYP.	Condition	TYP.	Condition
NNCD2.0DA	1.90	2.20	5	100	5	120	0.5	260	V _R = 0 V, f = 1 MHz	30	C = 150 pF, R = 330 Ω
NNCD2.2DA	2.10	2.40	5	100	5	120	0.7	250		30	
NNCD2.4DA	2.30	2.60	5	100	5	120	1.0	240		30	
NNCD2.7DA	2.50	2.90	5	110	5	120	1.0	235		30	
NNCD3.0DA	2.80	3.20	5	120	5	50	1.0	225		30	
NNCD3.3DA	3.10	3.50	5	130	5	20	1.0	220		30	
NNCD3.6DA	3.40	3.80	5	130	5	10	1.0	210		30	
NNCD3.9DA	3.70	4.10	5	130	5	10	1.0	200		30	
NNCD4.3DA	4.00	4.49	5	130	5	10	1.0	180		30	
NNCD4.7DA	4.40	4.92	5	130	5	10	1.0	170		30	
NNCD5.1DA	4.82	5.39	5	130	5	5	1.5	160		30	
NNCD5.6DA	5.29	5.94	5	80	5	5	2.5	140		30	
NNCD6.2DA	5.84	6.55	5	50	5	2	3.0	120		30	
NNCD6.8DA	6.44	7.17	5	30	5	2	3.5	110		30	
NNCD7.5DA	7.03	7.87	5	30	5	2	4.0	90		30	
NNCD8.2DA	7.73	8.67	5	30	5	2	5.0	90		30	
NNCD9.1DA	8.53	9.58	5	30	5	2	6.0	85		30	
NNCD10DA	9.42	10.58	5	30	5	2	7.0	80		30	
NNCD11DA	10.40	11.60	5	30	5	2	8.0	70		30	
NNCD12DA	11.38	12.64	5	35	5	2	9.0	70		30	
NNCD13DA	12.43	14.00	5	35	5	2	10	55		30	
NNCD15DA	13.80	15.56	5	40	5	2	11	48		30	
NNCD16DA	15.31	17.14	5	40	5	2	12	43		30	
NNCD18DA	16.89	19.08	5	45	5	2	13	38		30	
NNCD20DA	18.80	21.14	5	50	5	2	15	34		30	
NNCD22DA	20.81	23.25	5	55	5	2	17	30		30	
NNCD24DA	22.86	25.66	5	60	5	2	19	29		30	
NNCD27DA	25.10	28.90	2	70	2	2	21	25		30	
NNCD30DA	28.00	32.00	2	80	2	2	23	24		30	
NNCD33DA	31.00	35.00	2	80	2	2	25	23		25	
NNCD36DA	34.00	38.00	2	90	2	2	27	22	20		
NNCD39DA	37.00	41.00	2	100	2	2	30	21	20		

- Notes**
1. V_{BR} is tested with pulse (40 ms).
 2. Z_z is measured at I_T given a small A.C. signal.
 3. Based upon with IEC61000-4-2.

TYPICAL CHARACTERISTICS (T_A = 25°C)

Figure 1. POWER DISSIPATION vs.AMBIENT TEMPERATURE

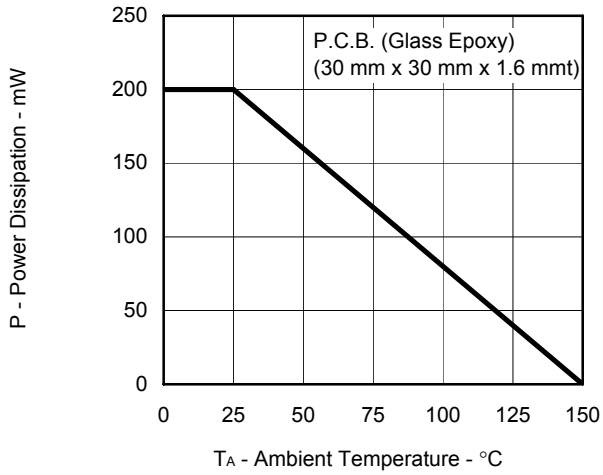

<R> Figure 2. I_T - V_{BR} CHARACTERISTICS (1/2)

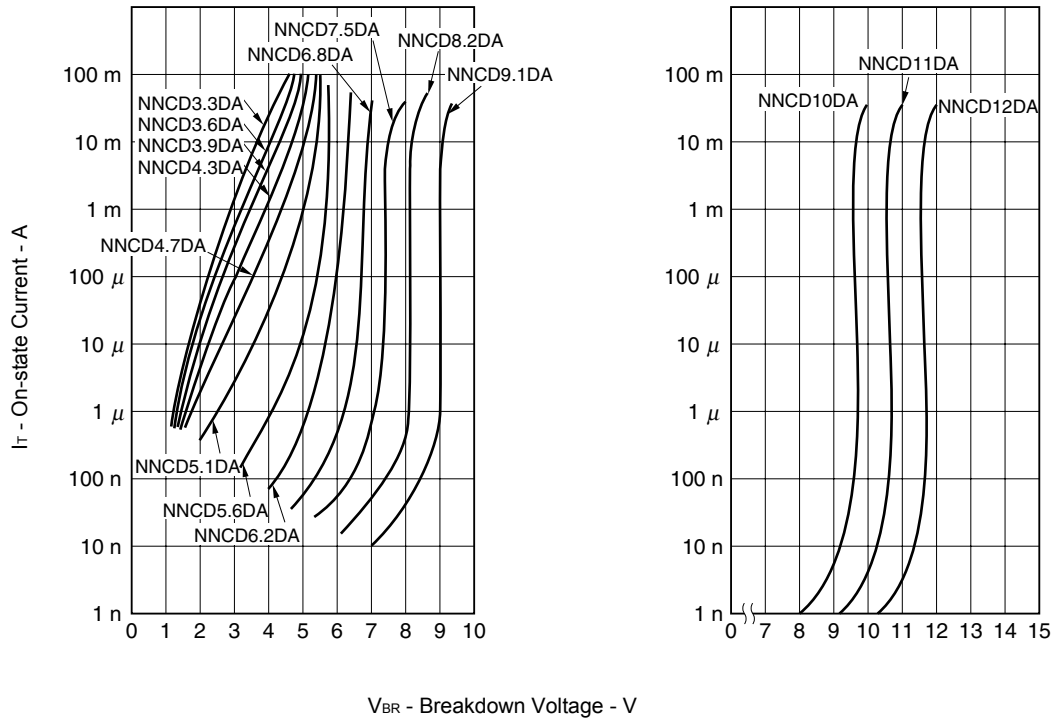


Figure 2. $I_T - V_{BR}$ CHARACTERISTICS (2/2)

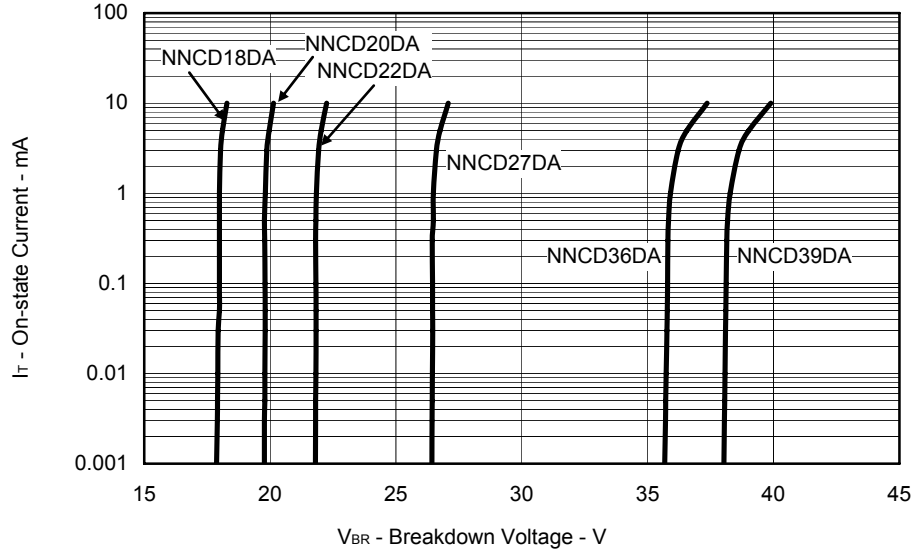


Figure 4. TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS



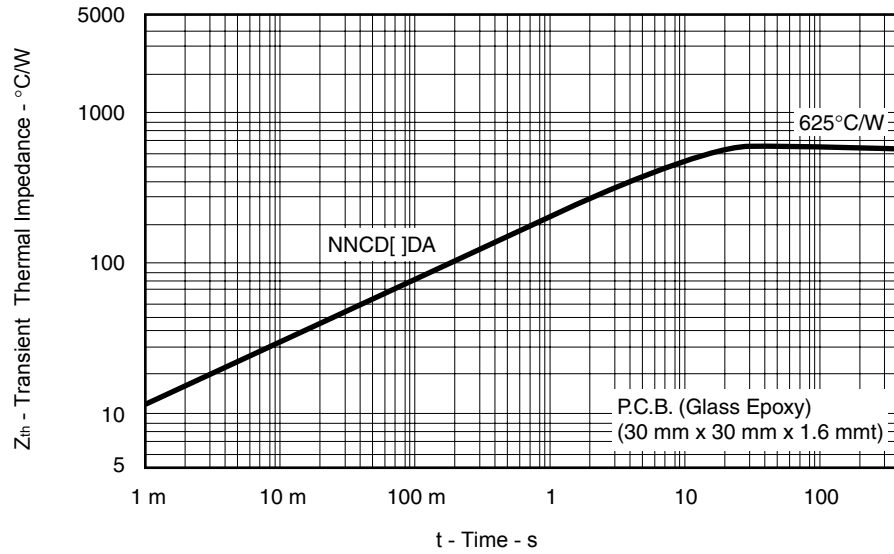


Figure 5. SURGE REVERSE POWER RATINGS

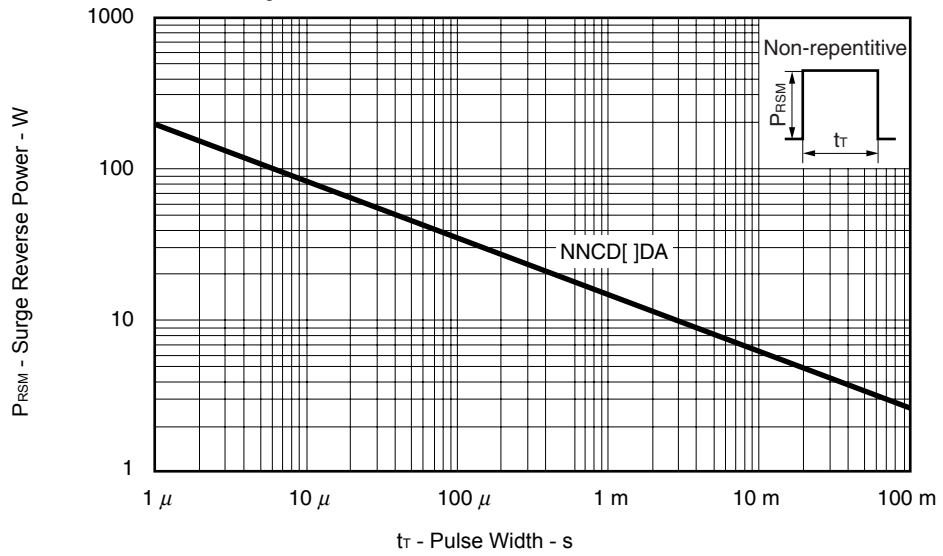

SAMPLE APPLICATION CIRCUIT

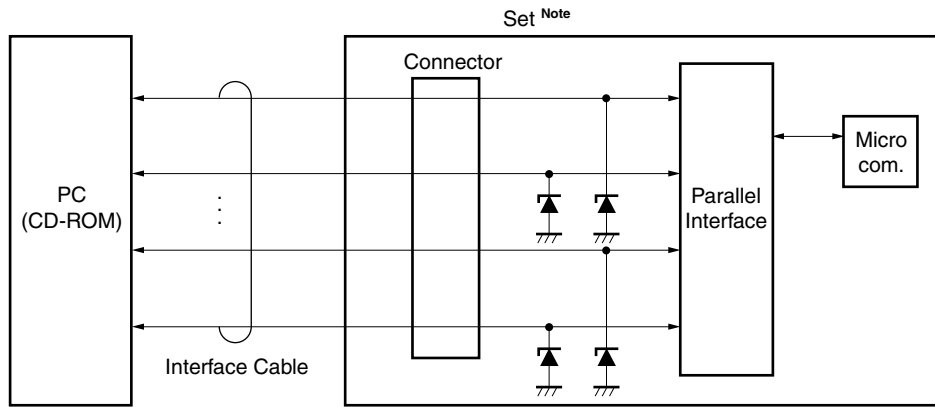

Note Set: Printer, P.C.D., T.V, Game, etc.

- The information in this document is current as of January, 2010. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.
 - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
 - NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
 - Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
 - While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
 - NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific". The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
- The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.
- (Note 1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

(M8E0909E)